

REV(版本)	DESCRIPTION(描述)	NAME(名字)	DATE(日期)

1

1

2

2

3


3

4



4

5

5



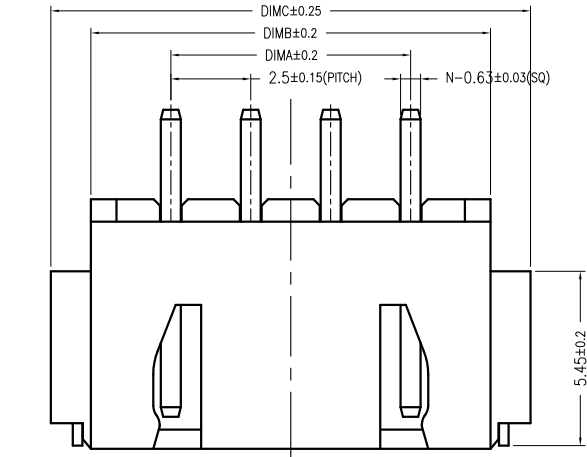


2P 结构

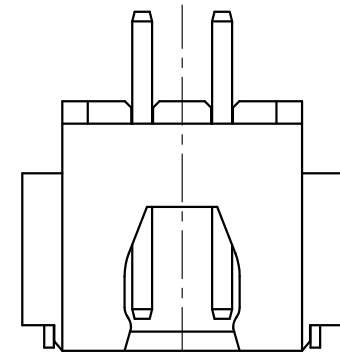

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 温度范围: -25° C~85° C.
- 额定电压: 250V, AC/DC.
- 接触电阻: ≤20mΩ.
- 绝缘电阻: ≥1000MΩ.
- 额定电流: 3A , AC/DC.

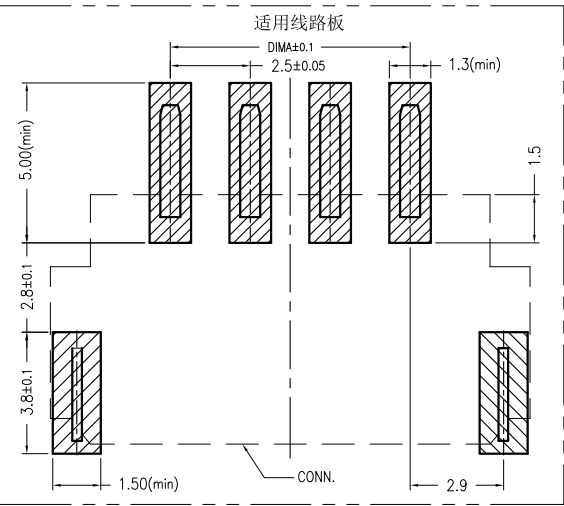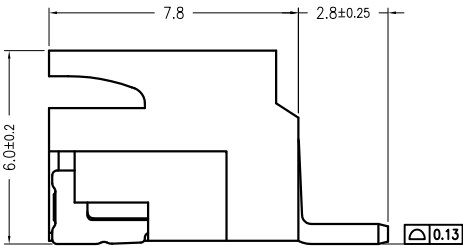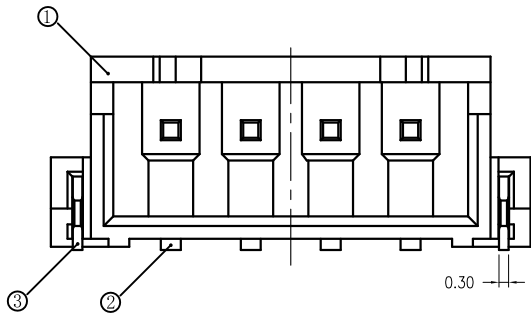

CKT	Dim A	Dim B	Dim C
2	2.50	7.50	10.00
3	5.00	10.00	12.50
4	7.50	12.50	15.00
5	10.00	15.00	17.50
6	12.50	17.50	20.00
7	15.00	20.00	22.50
8	17.50	22.50	25.00
9	20.00	25.00	27.50
10	22.50	27.50	30.00
11	25.00	30.00	32.50
12	27.50	32.50	35.00
13	30.00	35.00	37.50
14	32.50	37.50	40.00
15	35.00	40.00	42.50
16	37.50	42.50	45.00

序号	项目	描述	备注
1	塑胶	LCP	
2	端子	黄铜	
3	焊片	黄铜	

一般公差 (TOLERANCE)

X ±.50 .XX ±.10
X ±.20 .XX ±.05
ANGLES ±1°

深圳市兴成泰科技有限公司

品名 (TITLE)	制图 (DR)	XIAO
Pitch:2.50mm 卧式 SMT	校对 (CHKD)	Alex
料号 (DWG. NO)	审核 (APPD)	
比例 (SCALE)	单位 (UNITS)	页码 (SHEET)
1:1	mm	1 OF 1
		SIZE
		A4
		REV
		A