



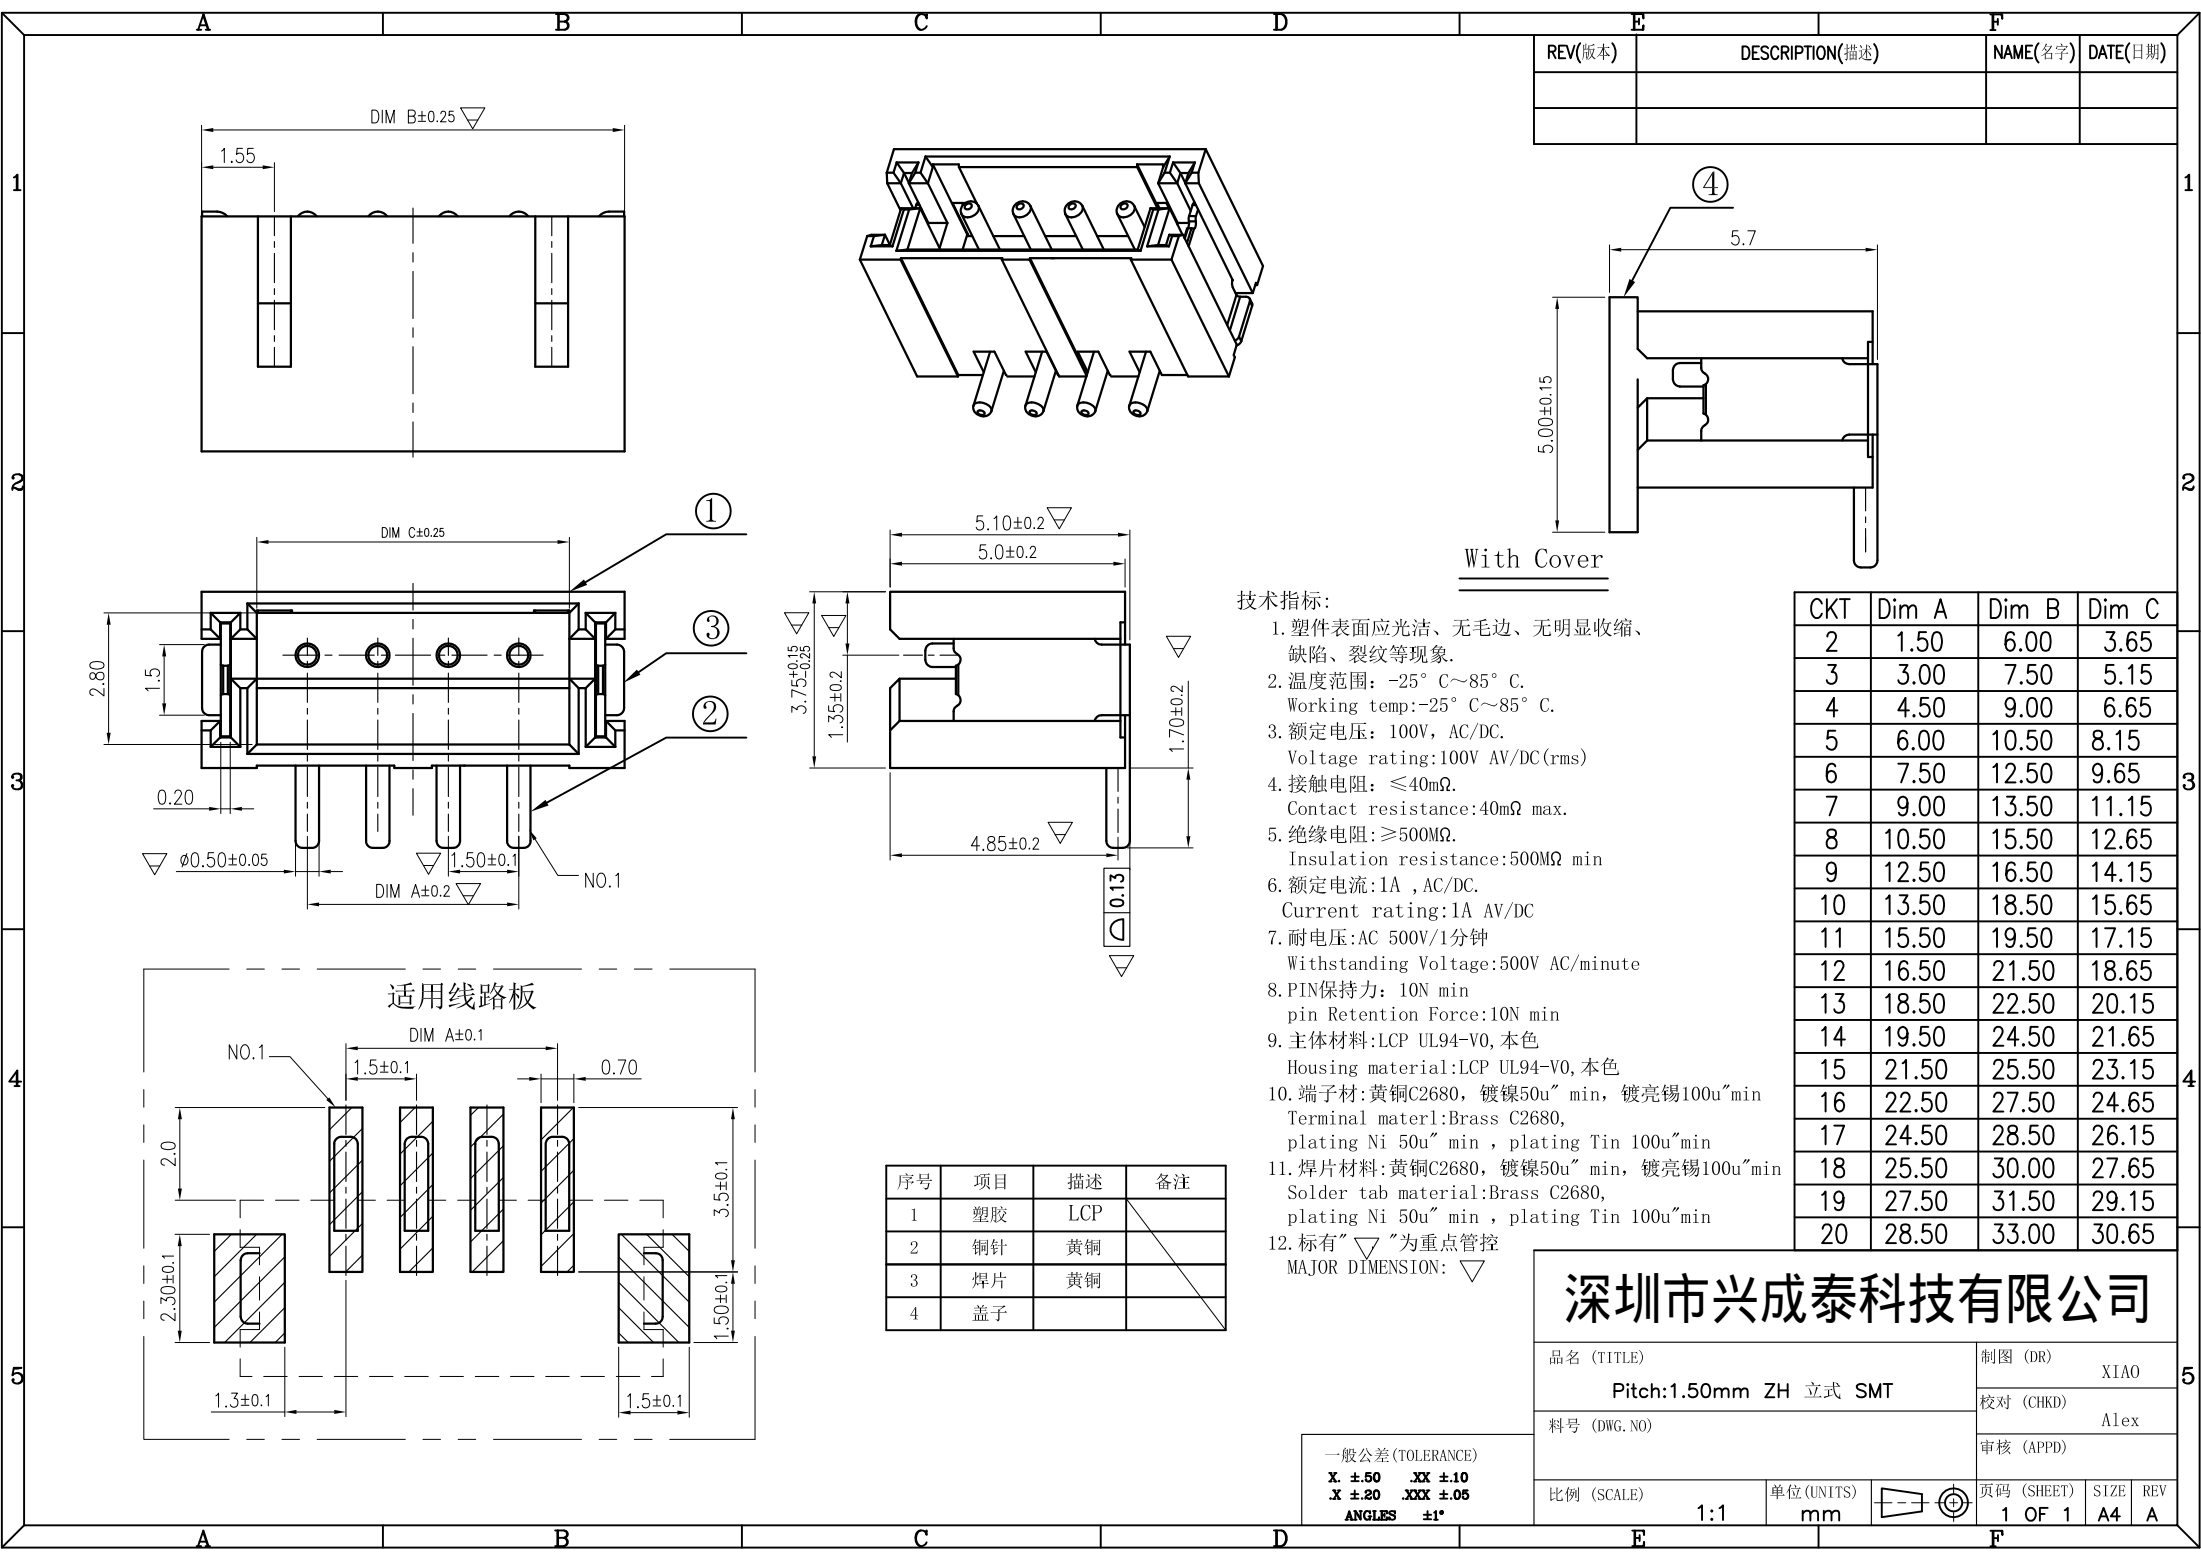

E		F	
REV(版本)	DESCRIPTION(描述)	NAME(名字)	DATE(日期)

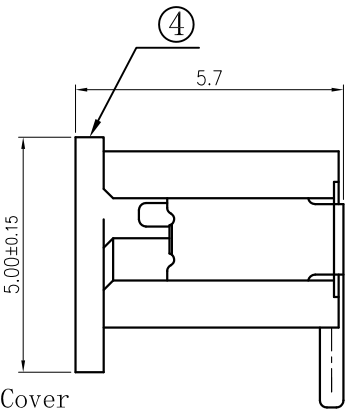

With Cover

- 技术指标:
- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 - 温度范围: -25° C~85° C.
Working temp:-25° C~85° C.
 - 额定电压: 100V, AC/DC.
Voltage rating:100V AV/DC(rms)
 - 接触电阻: ≤40mΩ.
Contact resistance:40mΩ max.
 - 绝缘电阻: ≥500MΩ.
Insulation resistance:500MΩ min
 - 额定电流:1A ,AC/DC.
Current rating:1A AV/DC
 - 耐电压:AC 500V/1分钟
Withstanding Voltage:500V AC/minute
 - PIN保持力: 10N min
pin Retention Force:10N min
 - 主体材料:LCP UL94-V0, 本色
Housing material:LCP UL94-V0, 本色
 - 端子材:黄铜C2680, 镀镍50u" min, 镀亮锡100u"min
Terminal materl:Brass C2680, plating Ni 50u" min , plating Tin 100u"min
 - 焊片材料:黄铜C2680, 镀镍50u" min, 镀亮锡100u"min
Solder tab material:Brass C2680, plating Ni 50u" min , plating Tin 100u"min
 - 标有"▽"为重点管控
MAJOR DIMENSION: ▽

CKT	Dim A	Dim B	Dim C
2	1.50	6.00	3.65
3	3.00	7.50	5.15
4	4.50	9.00	6.65
5	6.00	10.50	8.15
6	7.50	12.50	9.65
7	9.00	13.50	11.15
8	10.50	15.50	12.65
9	12.50	16.50	14.15
10	13.50	18.50	15.65
11	15.50	19.50	17.15
12	16.50	21.50	18.65
13	18.50	22.50	20.15
14	19.50	24.50	21.65
15	21.50	25.50	23.15
16	22.50	27.50	24.65
17	24.50	28.50	26.15
18	25.50	30.00	27.65
19	27.50	31.50	29.15
20	28.50	33.00	30.65

序号	项目	描述	备注
1	塑胶	LCP	
2	铜针	黄铜	
3	焊片	黄铜	
4	盖子		

深圳市兴成泰科技有限公司

品名 (TITLE)		制图 (DR)	
Pitch:1.50mm ZH 立式 SMT		XIAO	
料号 (DWG. NO)		校对 (CHKD)	
		Alex	
		审核 (APPD)	
比例 (SCALE)	1:1	单位 (UNITS)	mm
页码 (SHEET)	1 OF 1	SIZE	A4
REV	A		

一般公差 (TOLERANCE)	
X ±.50	.XX ±.10
X ±.20	.XX ±.05
ANGLES	±1°