

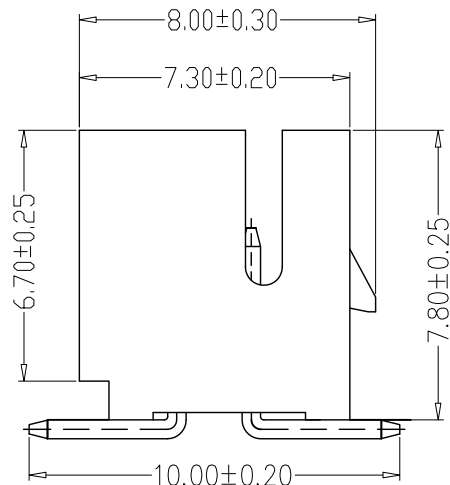
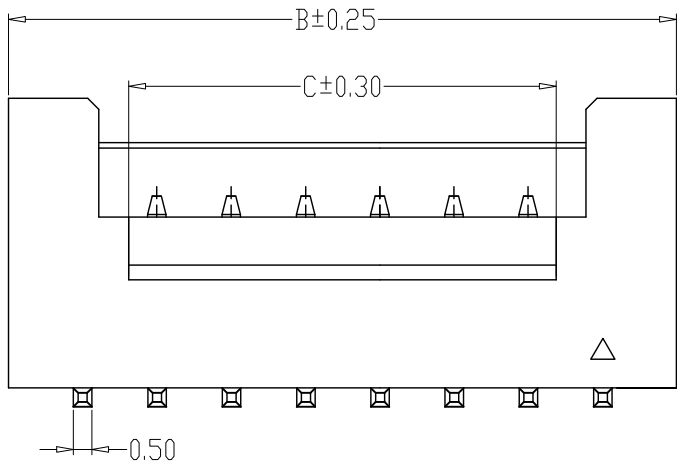


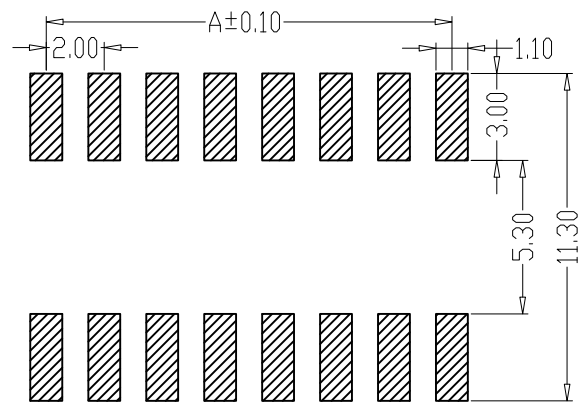

- SPECIFICATIONS
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 800V AC/minute
 - 7、Material: Wafer Nylon46, UL94V-0
PIN Brass Tin-plated

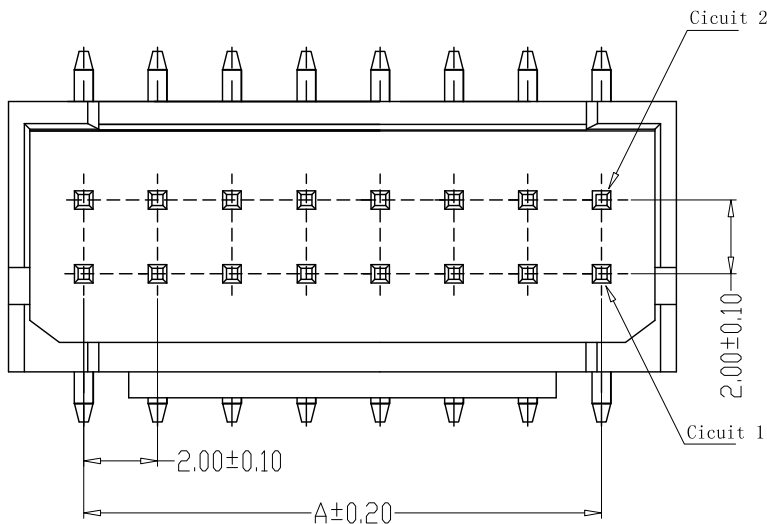

PCB LAYOUT

编 号	尺寸 (mm)		
	A	B	C
2x02A	2.00	6.00	3.00
2x03A	4.00	8.00	3.00
2x04A	6.00	10.00	3.00
2x05A	8.00	12.00	5.00
2x06A	10.00	14.00	7.00
2x07A	12.00	16.00	9.00
2x08A	14.00	18.00	11.00
2x09A	16.00	20.00	13.00
2x10A	18.00	22.00	15.00
2x11A	20.00	24.00	17.00
2x12A	22.00	26.00	19.00
2x13A	24.00	28.00	21.00
2x14A	26.00	30.00	23.00
2x18A	34.00	38.00	31.00
2x20A	38.00	42.00	35.00
2x22A	42.00	46.00	39.00

制图 DRAWN	变更内容 DESCRIPTION	日 期 DATE	GENERL TOLERANCE		制 图 DRAWING	钱岳生			料 号 PART NO.			版 本 REV.	A
			X.±0.25	X.*±2°		2016、10、24	品 名			页 次			
			.X±0.20	.X*±1°		2016、10、24	TITLE			SHEET	1/1		
			.XX±0.15	.XX*±0.5°		2016、10、25	客户料号						
			.XXX±0.10	.XXX*±0.5°		APPROVAL	CUTM. NO.						
				单 位 UNITS	MM	比例 SCALE	1:1	深圳市兴成泰科技有限公司					